


| Key Performance Parameters | | |
|-------------------------------|-------|------------|
| Parameter | Value | Unit |
| V_{DSS} | 30 | V |
| $R_{DS(ON) \max.} V_{GS}=10V$ | 2.9 | m Ω |
| I_D | 68 | A |
| Q_g | 41.2 | nC |
| Q_{gd} | 8.30 | nC |
| Q_{SW} | 12.6 | nC |

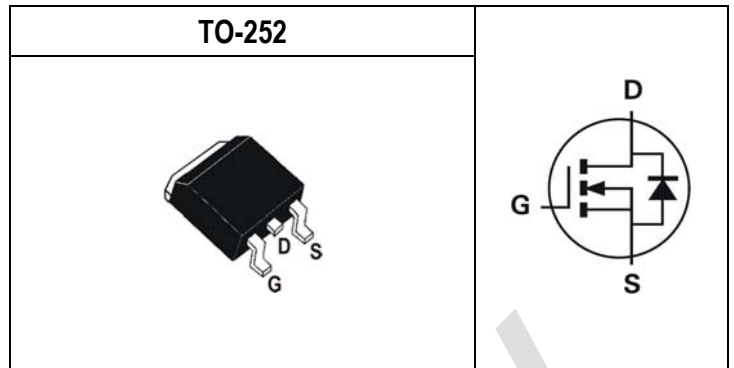

| Features | Application |
|--|---|
| <ul style="list-style-type: none"> Optimized for synchronous rectification Low Input Capacitance Low Miller Capacitance Fully Characterized Capacitance and Avalanche Pb-free lead plating; RoHS compliant | <ul style="list-style-type: none"> BLDC Motor drive applications Battery powered circuits Synchronous rectifier applications Resonant mode power supplies |

Ordering Information

| Ordering Code | RoHS Status | Package | Package Code | Packing | Quantity |
|---------------|--------------|---------|--------------|-------------|----------|
| DG30N17D | Halogen-Free | TO-252 | D | Tape & Reel | 2,500 |

Absolute Maximum Ratings ($T_J=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit | |
|---|-----------|-------------------------|------------------|---|
| Drain-Source Voltage | V_{DS} | 30 | V | |
| Gate-Source Voltage | V_{GS} | ± 20 | V | |
| Drain Current-Continuous | I_D | $T_C=25^\circ\text{C}$ | 68 | A |
| | | $T_C=100^\circ\text{C}$ | 43 | A |
| Drain Current-Pulsed ^{Note 1} | I_{DM} | 168 | A | |
| Avalanche Current | I_{AR} | 38 | A | |
| Single Pulse Avalanche Energy ^{Note 3} | E_{AS} | 72 | mJ | |
| Maximum Power Dissipation | P_{tot} | 20 | W | |
| Operating Junction Temperature Range | T_J | 150 | $^\circ\text{C}$ | |

Thermal Resistance Ratings

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------|--------------|------|------|------|---------------------------|
| Thermal resistance, Junction-to-Ambient ^{Note 2} | $R_{\theta JA}$ | Steady State | - | 26.3 | - | $^\circ\text{C}/\text{W}$ |
| Thermal resistance, Junction-to-Case | $R_{\theta JC}$ | Steady State | - | 6.71 | - | $^\circ\text{C}/\text{W}$ |

Notes:

- Pulse Test: Pulse Width $\leq 10\text{ms}$, Duty Cycle $\leq 1\%$.
- For surface-mounted devices, both $R_{\theta JA}$ and $R_{\theta JC}$ are measured with the device mounted on approximately $1'' \times 1''$ FR-4 PCBs. In actual applications, many factors including the PCB material and layout, may affect the thermal resistance of the device-board assembly. For best results, characterize the thermal resistance directly in the application circuit.
- Starting $T_J=25^\circ\text{C}$, $V_D=20\text{V}$, $L=0.1\text{mH}$, $V_{GS}=10\text{V}$.

Electrical Characteristics (T_J=25°C unless otherwise noted)

| STATIC CHARACTERISTICS | | | | | | |
|---------------------------------|----------------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Drain-Source Breakdown Voltage | V _{(BR)DSS} | V _{GS} =0V, I _{DS} =1mA | 30 | - | - | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =30V, V _{GS} =0V, T _J =25°C | - | - | 1 | μA |
| | | V _{DS} =30V, V _{GS} =0V, T _J =125°C | - | - | 25 | μA |
| Gate-Body Leakage | I _{GSS} | V _{GS} =±20V, V _{DS} =0V | - | - | ±100 | nA |

| STATIC CHARACTERISTICS | | | | | | |
|----------------------------------|---------------------|---|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Gate Threshold Voltage | V _{GS(TH)} | V _{DS} =V _{GS} , I _{DS} =250μA | 1.0 | - | 2.4 | V |
| Drain-Source On-State Resistance | R _{DS(ON)} | V _{GS} =10V, I _{DS} =30A | - | - | 2.9 | mΩ |
| Drain-Source On-State Resistance | R _{DS(ON)} | V _{GS} =4.5V, I _{DS} =15A | - | - | 4.5 | mΩ |
| Gate Resistance | R _g | V _{GS} =0V, V _{DS} =0V, f=1MHz | - | 2.5 | 5.3 | Ω |
| Forward Transconductance | g _{fs} | V _{DS} =5V, I _{DS} =20A | - | 7.5 | - | S |


| DYNAMIC CHARACTERISTICS | | | | | | |
|------------------------------|---------------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Input Capacitance | C _{iss} | V _{DS} =15V, V _{GS} =0V, f=1MHz | - | 2256 | - | pF |
| Output Capacitance | C _{oss} | V _{DS} =15V, V _{GS} =0V, f=1MHz | - | 1819 | - | pF |
| Reverse Transfer Capacitance | C _{rss} | V _{DS} =15V, V _{GS} =0V, f=1MHz | - | 109 | - | pF |
| Turn-On Delay Time | T _{d(on)} | V _{DS} =15V, V _{GS} =10V, I _{DS} =20A, R _{GEN} =3Ω | - | 13.3 | - | ns |
| Rise Time | t _r | V _{DS} =15V, V _{GS} =10V, I _{DS} =20A, R _{GEN} =3Ω | - | 76.8 | - | ns |
| Turn-Off Delay Time | T _{d(off)} | V _{DS} =15V, V _{GS} =10V, I _{DS} =20A, R _{GEN} =3Ω | - | 53.6 | - | ns |
| Fall Time | t _f | V _{DS} =15V, V _{GS} =10V, I _{DS} =20A, R _{GEN} =3Ω | - | 68.0 | - | ns |

| GATE CHARGE CHARACTERISTICS | | | | | | |
|--|----------------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Gate to Source Gate Charge | Q _{gs} | V _{DD} =15V, I _D =20A | - | 8.28 | - | nC |
| Gate charge at threshold | Q _{g(th)} | V _{DD} =15V, I _D =20A | - | 3.97 | - | nC |
| Gate to Drain Charge | Q _{gd} | V _{DD} =15V, I _D =20A | - | 8.30 | - | nC |
| Switching charge | Q _{SW} | V _{DD} =15V, I _D =20A | - | 12.6 | - | nC |
| Gate charge total | Q _g | V _{DD} =20V, I _D =20A, V _{GS} =0 to 10V | - | 41.2 | - | nC |
| Gate plateau voltage | V _{plateau} | V _{DD} =20V | - | 3.40 | - | V |
| Gate charge total, sync. FET (Q _g - Q _{gd}) | Q _{g(sync)} | V _{GS} =0 to 10V | - | 32.9 | - | nC |


| DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS | | | | | | |
|--|------------------|--|------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
| Diode Forward Voltage | V _{SD} | V _{GS} =0V, I _F =20A | - | 0.7 | 1.3 | V |
| Body Diode Reverse Recovery Time | t _{rr} | V _{DD} =15V, I _F =20A, di/dt=100A/μs | - | 48.9 | - | ns |
| | | V _{DD} =24V, I _F =20A, di/dt=200A/μs | - | 47.2 | - | ns |
| Body Diode Reverse Recovery Charge | Q _{rr} | V _{DD} =15V, I _F =20A, di/dt=100A/μs | - | 45.5 | - | nC |
| | | V _{DD} =24V, I _F =20A, di/dt=200A/μs | - | 70.8 | - | nC |
| Reverse Recovery Current | I _{RRM} | V _{DD} =15V, I _F =20A, di/dt=100A/μs | - | 1.57 | - | A |
| | | V _{DD} =24V, I _F =20A, di/dt=200A/μs | - | 2.58 | - | A |

Typical Operating Characteristics


Output Characteristics

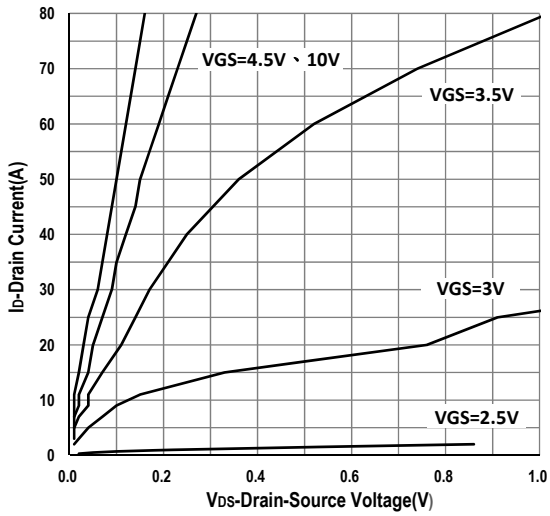


Gate Threshold Voltage

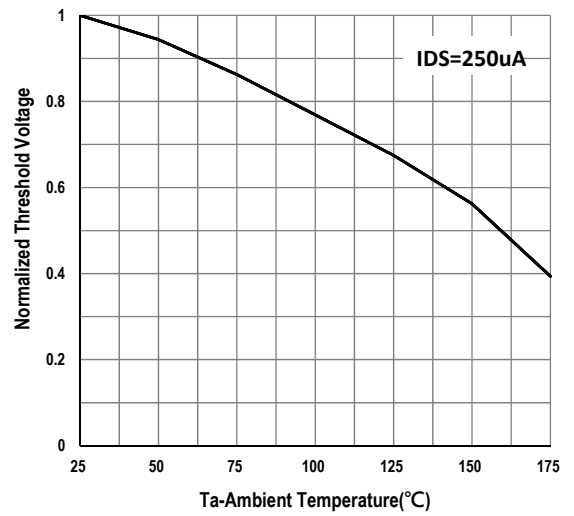


Gate-Source On Resistance

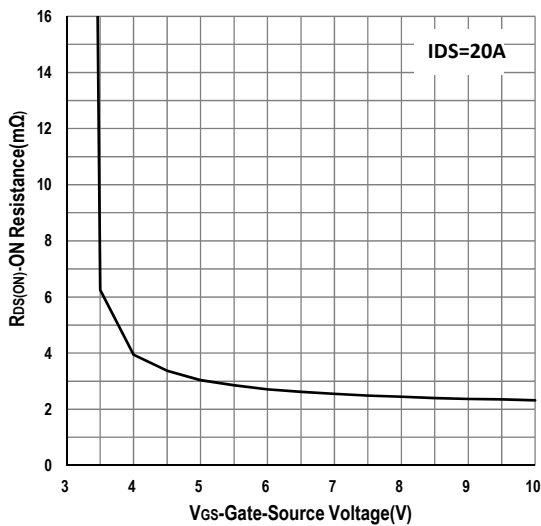


Drain-Source On Resistance

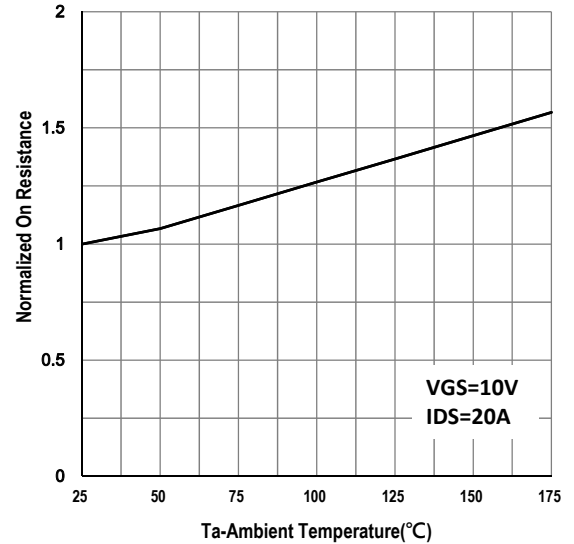

Drain-Source On Resistance

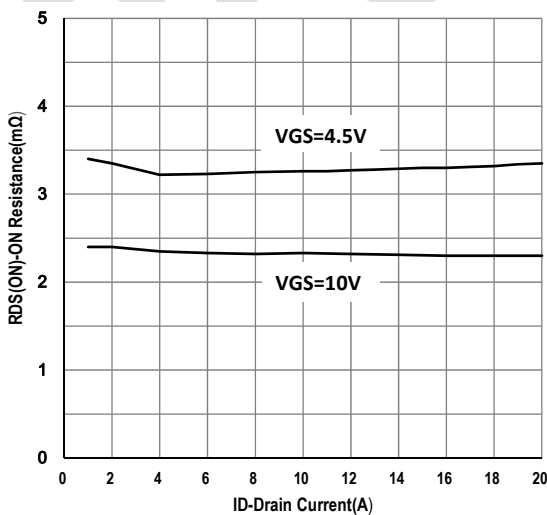


Drain-source Breakdown Voltage

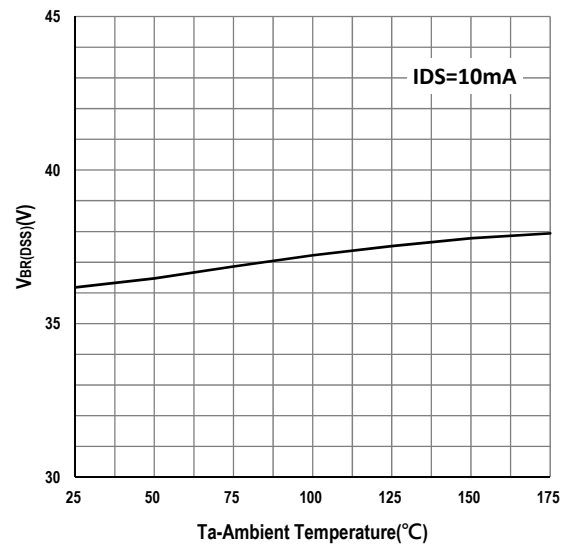


Typical Operating Characteristics (Cont.)


Power Dissipation

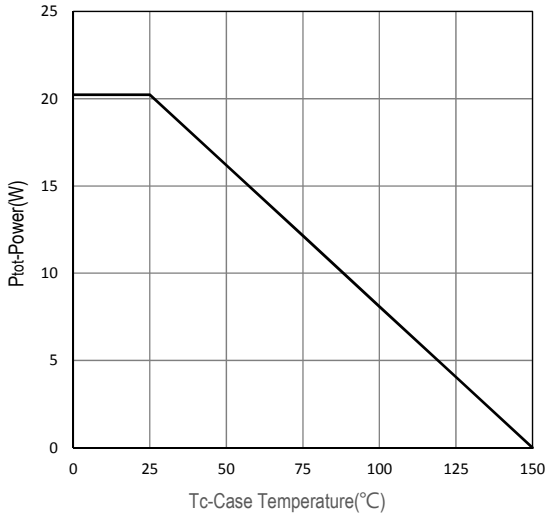


Drain Current

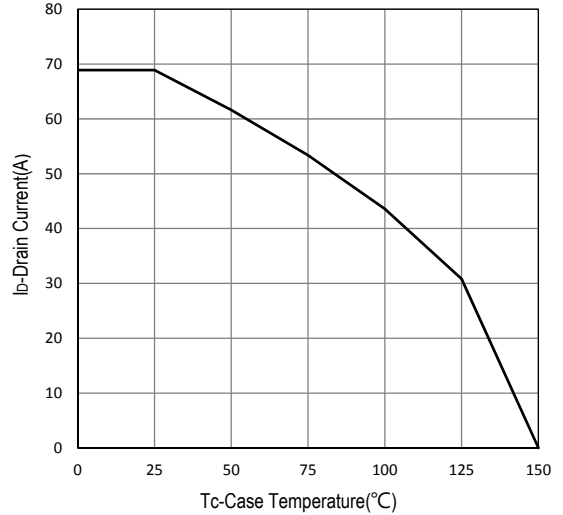


Safe Operation Area

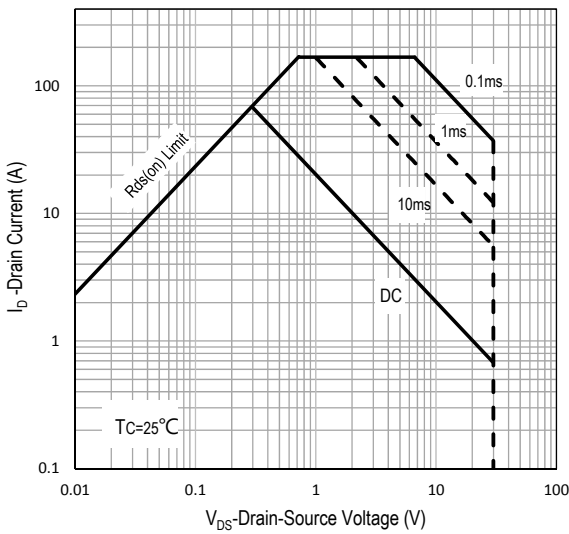


Transient Thermal Impedance

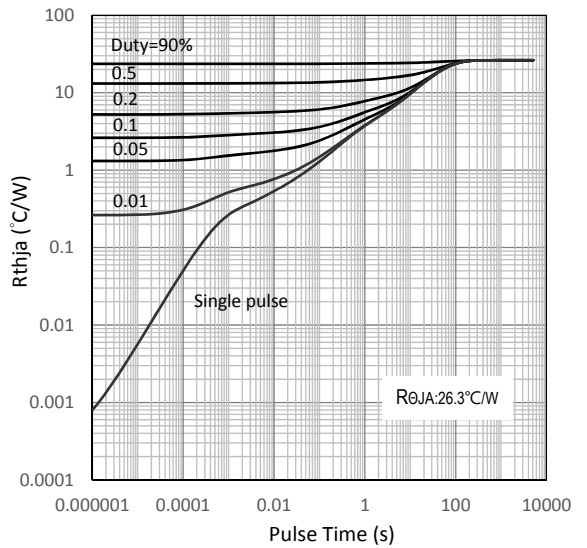


Capacitance

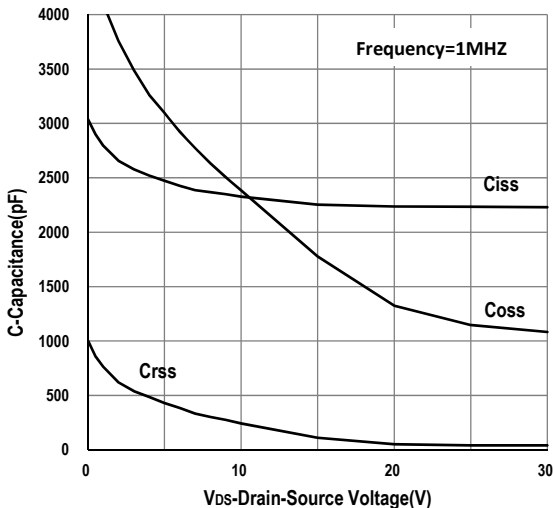


Gate Charge

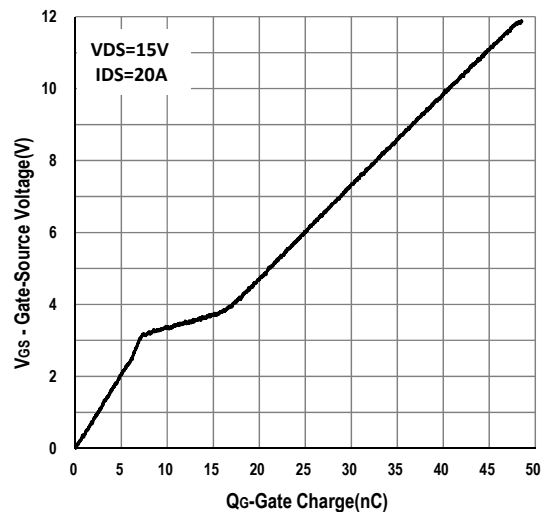

Marking Information
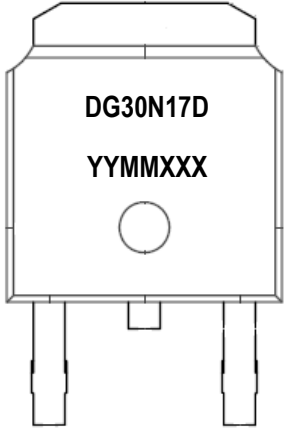
| TO-252 (D) | Marking Rule |
|---|---|
| <p>Laser Marking</p>  <p>The diagram shows a TO-252 (D) MOSFET package. On the top surface, there are two lines of laser marking: 'DG30N17D' and 'YYMMXXX'. Below the markings is a small circular feature. The package has three leads extending from the bottom.</p> | <p><u>Line 1</u> : Device DG30N17D</p> <p><u>Line 2</u> : Date Code YYMMXXX</p> <p>YY : Year Code MM : Month Code XXX : Serial Number</p> |

Package of Dimension

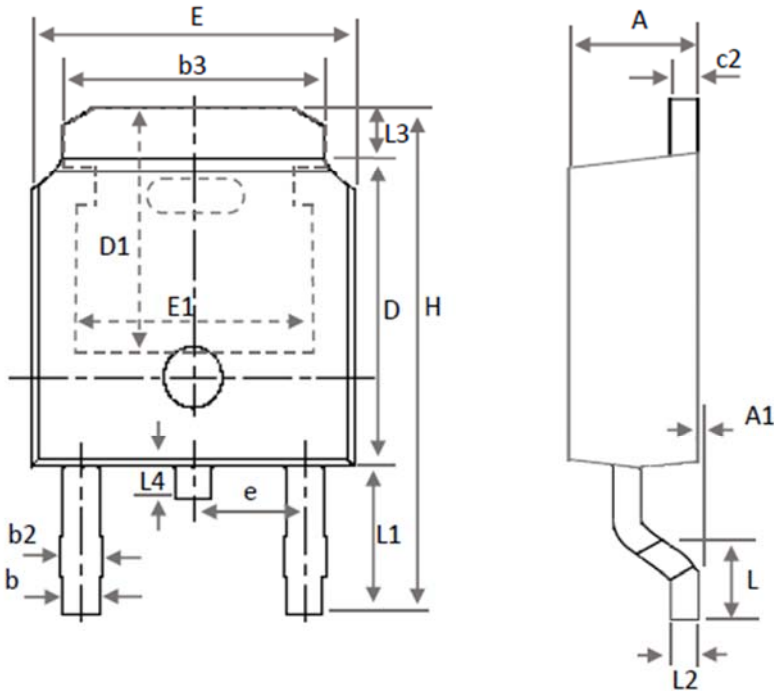


| Symbol | Min | Nor | Max |
|--------|------------|------|-------|
| E | 6.35 | 6.54 | 6.731 |
| L | 1.40 | 1.59 | 1.78 |
| L1 | 2.743 Ref. | | |
| L2 | 0.508 BSC | | |
| L3 | 0.89 | 1.08 | 1.27 |
| L4 | 0.60 | 0.81 | 1.01 |
| D | 5.97 | 6.10 | 6.223 |
| H | 9.40 | 9.91 | 10.41 |
| b | 0.64 | 0.77 | 0.89 |
| b2 | 0.76 | 0.95 | 1.14 |
| b3 | 4.95 | 5.21 | 5.46 |
| e | 2.286 BSC | | |
| A | 2.18 | 2.29 | 2.39 |
| A1 | 0.00 | 0.07 | 0.13 |
| c2 | 0.46 | 0.68 | 0.89 |
| D1 | 5.21 | - | - |
| E1 | 4.32 | - | - |

Soldering Methods for Silicongear's Products

1. Storage environment: Temperature=10°C to 35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

Figure 1: Temperature profile

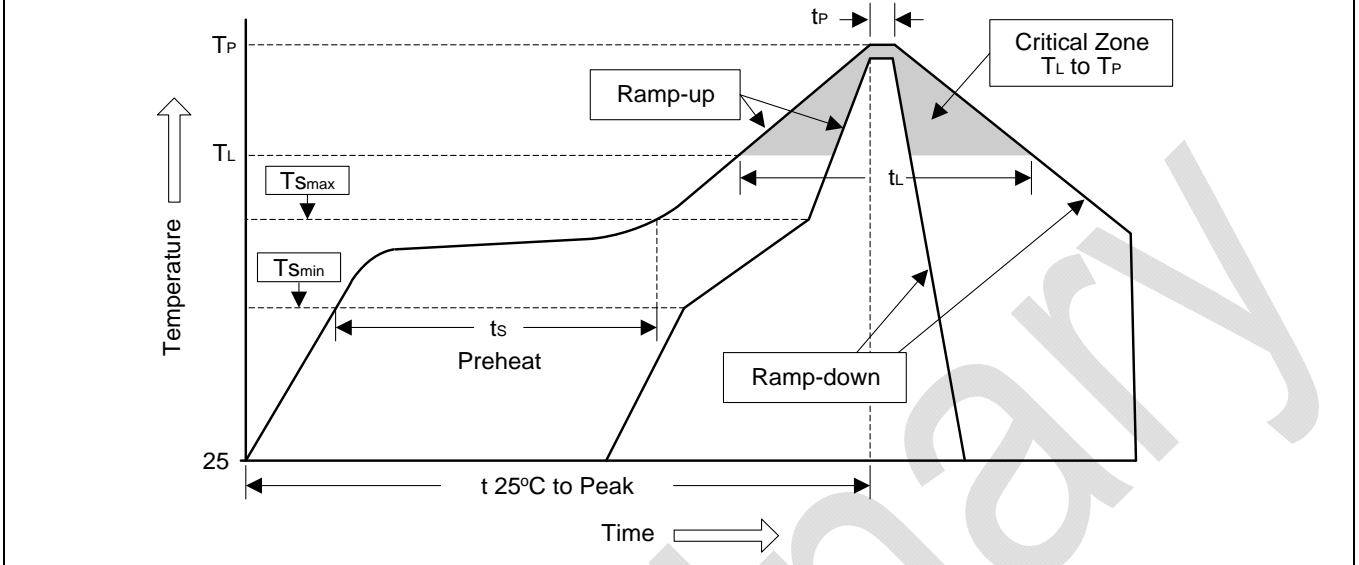

| Profile Feature | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|--|-------------------------|------------------|
| Average ramp-up rate (T _L to T _P) | <3°C/sec | <3°C/sec |
| Preheat | | |
| - Temperature Min (T _{Smin}) | 100°C | 150°C |
| - Temperature Max (T _{Smax}) | 150°C | 200°C |
| - Time (min to max) (t _s) | 60 to 120 sec | 60 to 180 sec |
| T _{Smax} to T _L | | |
| - Ramp-up Rate | <3°C/sec | <3°C/sec |
| Time maintained above: | | |
| - Temperature (T _L) | 183°C | 217°C |
| - Time (t _L) | 60 to 150 sec | 60 to 150 sec |
| Peak Temperature (T _P) | 240°C +0/-5°C | 260°C +0/-5°C |
| Time within 5°C of actual Peak Temperature (t _P) | 10 to 30 sec | 20 to 40 sec |
| Ramp-down Rate | <6°C/sec | <6°C/sec |
| Time 25°C to Peak Temperature | <6 minutes | <8 minutes |

3. Flow (wave) soldering (solder dipping)

| Products | Peak Temperature | Dipping Time |
|------------------|------------------|--------------|
| Pb devices. | 245°C ±5°C | 5sec ±1sec |
| Pb-Free devices. | 260°C +0/-5°C | 5sec ±1sec |

Important Notice

© Silicongear Corporation

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Silicongear cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an Silicongear product. No circuit patent licenses, copyrights, mask work rights, or other intellectual property rights are implied.

Silicongear Corporation, its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Silicongear"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Silicongear makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Silicongear disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Silicongear's knowledge of typical requirements that are often placed on Silicongear products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Silicongear's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Silicongear products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Silicongear product could result in personal injury or death. Customers using or selling Silicongear products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Silicongear and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Silicongear or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Silicongear personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Silicongear. Product names and markings noted herein may be trademarks of their respective owners.

Silicongear and the Silicongear logo are trademarks of Silicongear Corporation. All other brand and product names appearing in this document are registered trademarks or trademarks of their respective holders.